
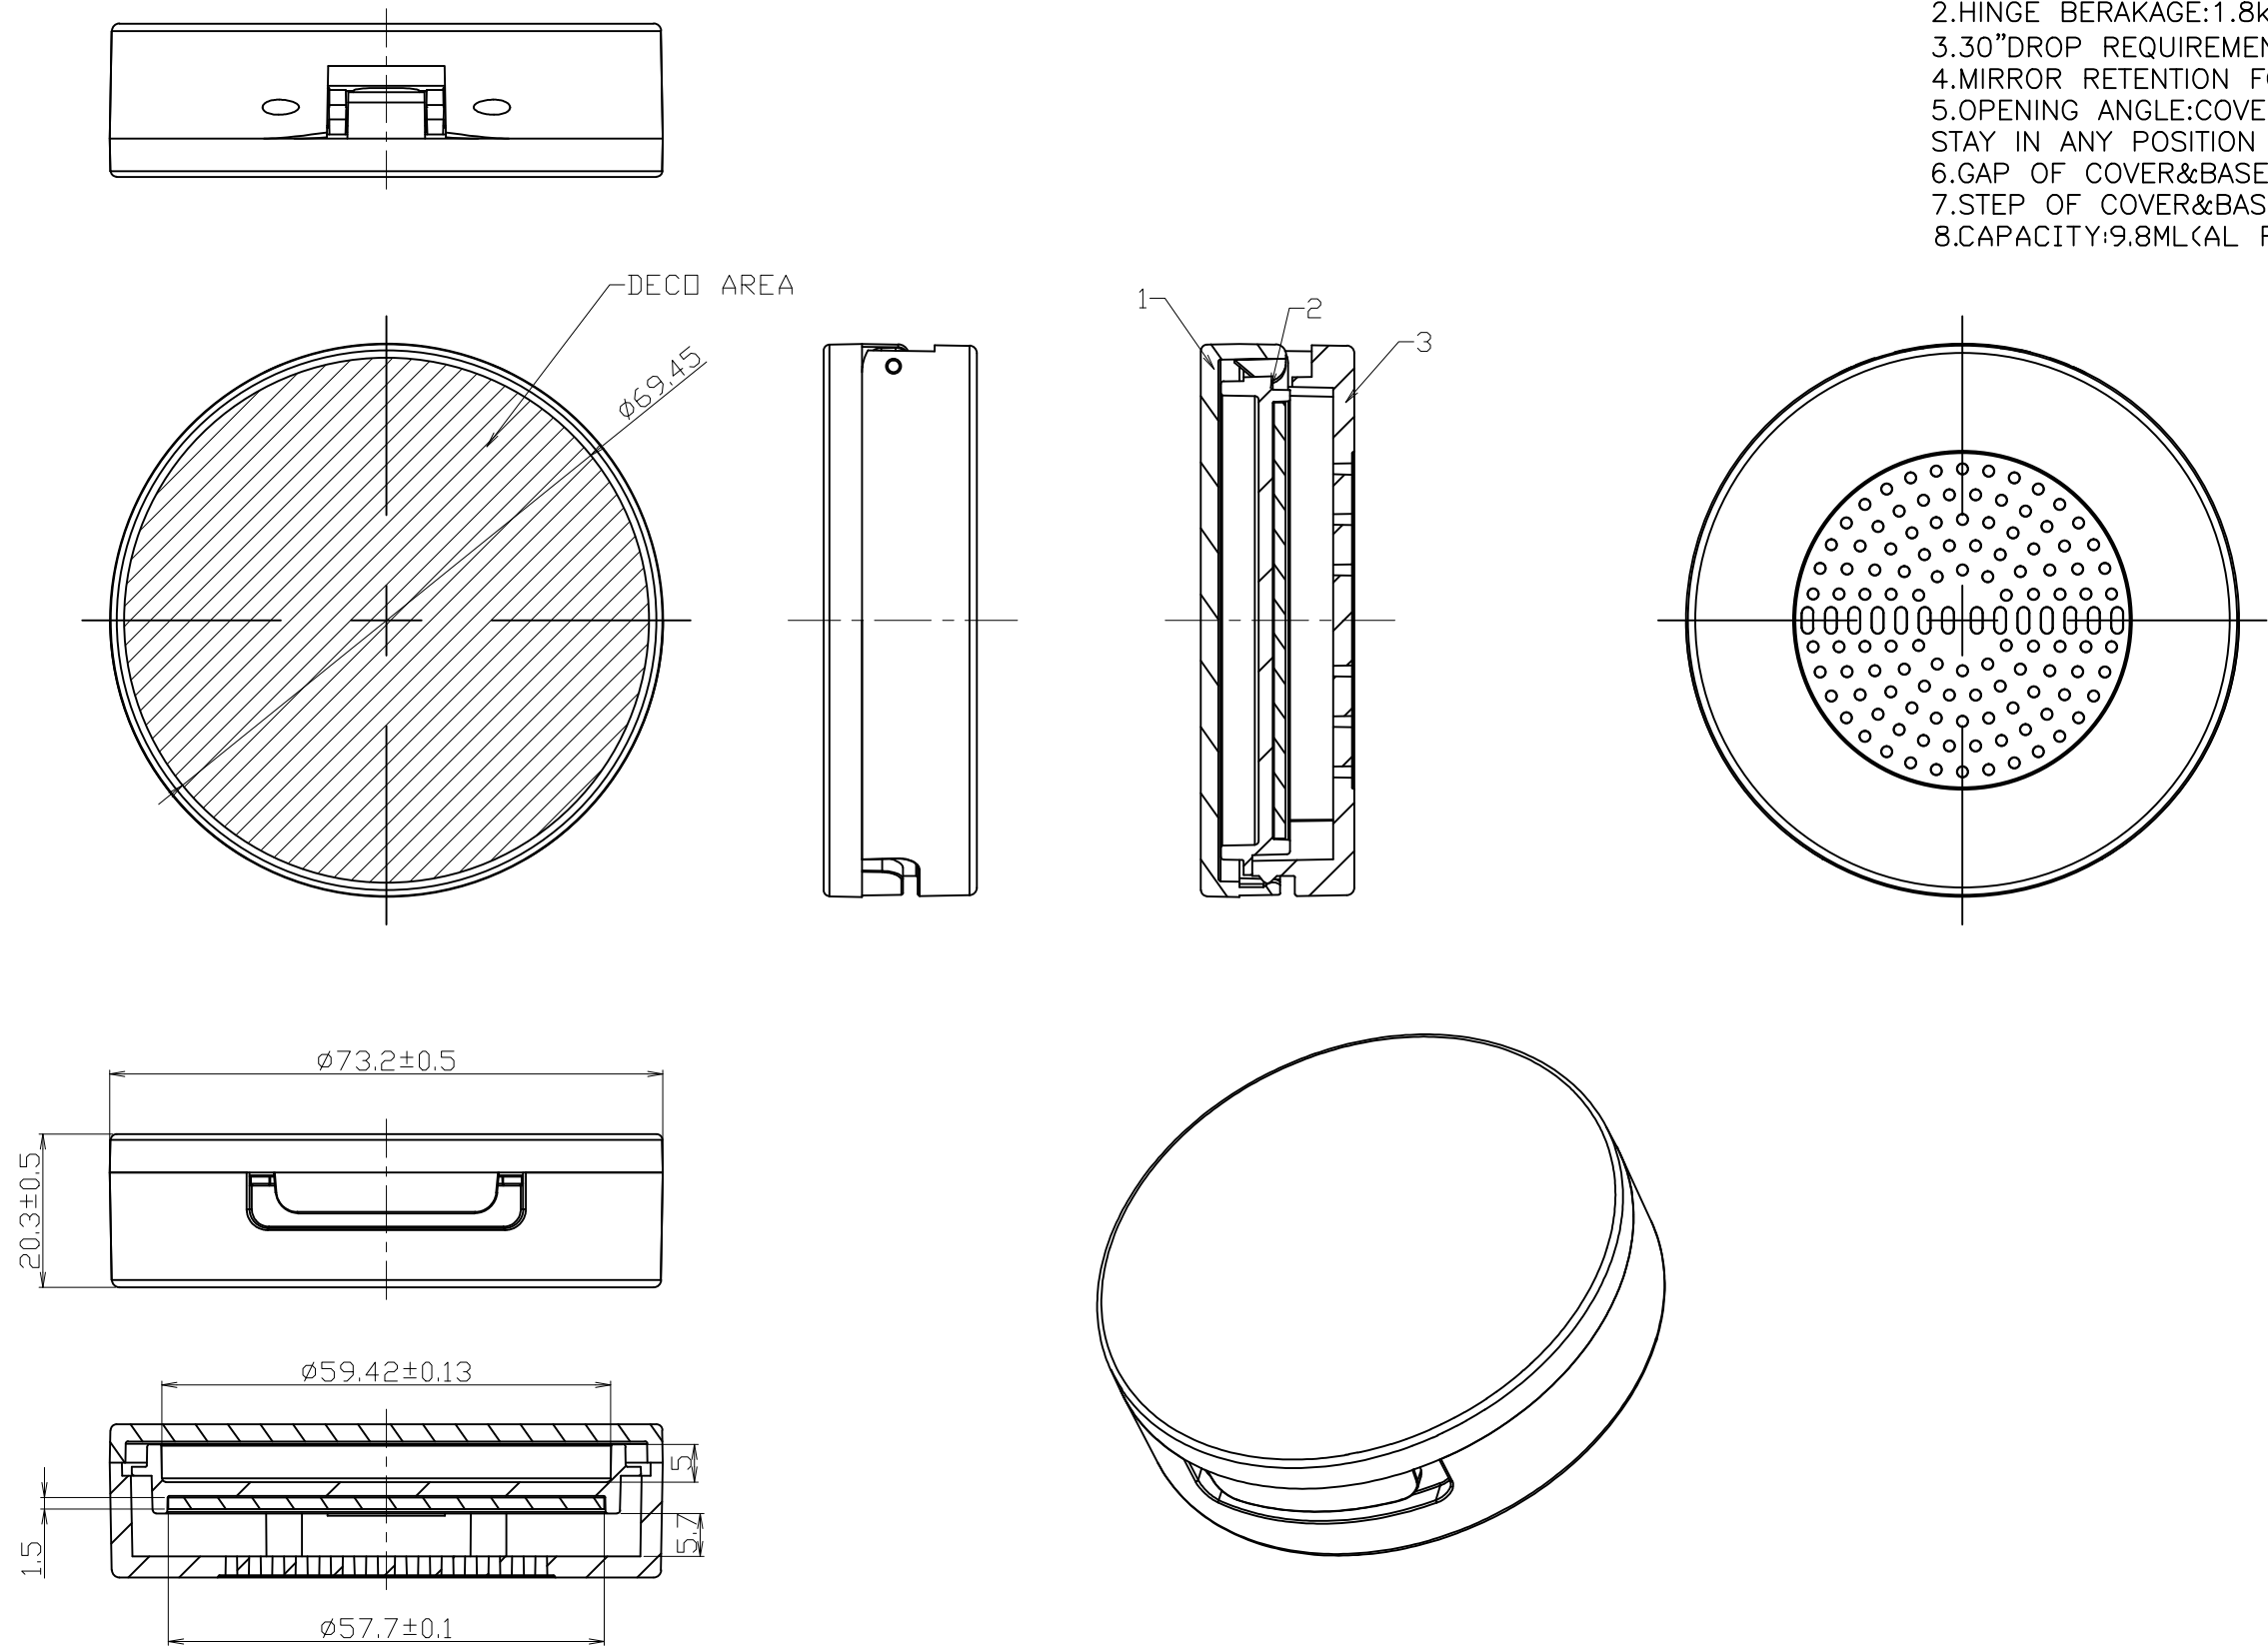


NOTE:
1.OPENING FORCE RANGE:0.15kgf~1.2kgf
2.HINGE BERAKAGE:1.8kgf MIN
3.30"DROP REQUIREMENT: NO BREAKAGE
4.MIRROR RETENTION FORCE:3kgf MIN
5.OPENING ANGLE:COVER:0°~125°, INSERT:0°~10°,10°~125°,
STAY IN ANY POSITION
6.GAP OF COVER&BASE:0.3mm MAX
7.STEP OF COVER&BASE:0.3mm MAX
8.CAPACITY:9.8ML(AL PAN)



TOLERANCE
0-6 :±0.1
6-30 :±0.2
30-120 :±0.3
120-315 :±0.5
Angle: ±0.5°
sharp
edges: R0.2mox

4	1	MIRROR	D12083	GLASS
3	1	BASE	D12079	ABS
2	1	INSERT	D12082	AS/ABS
1	1	COVER	D12077	AS/ABS
No. Qty		Part name	Drawing No.	Material

4				CUSTOMER						
3				PART	ASSEMBLY					
2				NAME	2-WAY COMPACT	DESIGN	Leo	DATE	2013/2/22	
1				CODE	PC2020016	CHECKED		APPROVED		
NO.	REVISIONS DESCRIPTION	DRAWN	DATE	SCALE	1: 1		PLATE	A3	MATERIAL	----
*Dim. are adjustable based on functional requirement		TOL.	---	UNIT	mm[in]	DRAWING NO.	D12081	REV	00	